

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 19, 2013

WELL WORK PERMIT Horizontal 6A Well

This permit, API Well Number: 47-103308, issued to CNX GAS COMPANY LLC , is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: PHL3DHS

Farm Name: PHILIPPI DEVELOPMENT, INC

API Well Number: 47-103308

Permit Type: Horizontal 6A Well

Date Issued: 11/19/2013

Promoting a healthy environment.



PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit</u> conditions may result in enforcement action.

CONDITIONS

- 1. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 2. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% (unless soil test results show a greater range of moisture content is appropriate and 95% compaction can still be achieved) of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95% compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 3. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 4. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 5. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 6. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 7. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B (3/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

	<u>W</u>	ELL WORK PE	ERMIT APPLICAT	CION	010	545
1) Well Operator:	CNX Gas Cor	npany LLC	494458046	Barbour	Pleasant	Philippi
•			Operator ID	County	District	Quadrangle
2) Operator's Well 1	Number: PHL31	DHS	V	Vell Pad Nam	ie: PHL3HS	***************************************
3 Elevation, current	t ground: 1444	Ele	evation, proposed p	ost-construc	tion:	1445'
4) Well Type: (a) G	Gas	Oil	Underground	l Storage		_
9	Other					
(b) If	f Gas: Shallow		Deep			
	Horizon	ntal				
5) Existing Pad? Ye	es or No: NO					
6) Proposed Target	Formation(s), De	pth(s), Anticipat	ed Thicknesses and	d Associated	Pressure(s):	
	pth - 7545', Thickness - 90'					
7) Proposed Total V	ertical Denth	7735'			Dessived	
8) Formation at Total	•		_	Off	Received ice of Oil & Ga	as
		Huntersville Che	en.			
9) Proposed Total M	leasured Depth:	15,035'		M	AY 2 1 2013	
10) Approximate Fr	esh Water Strata	Depths: 32	8', 544', 665'			,
11) Method to Deter	rmine Fresh Wate	er Depth: R	eference Offset Wells			
12) Approximate Sa	altwater Depths:	None Reported				
13) Approximate Co	oal Seam Depths:	544', 665'				
14) Approximate De	epth to Possible V	oid (coal mine,	karst, other):	None Antic	ipated	
15) Does proposed value adjacent to an ac			irectly overlying ond depth of mine:	Yes, S	entinel Mine	e 544' & 665'
16) Describe propos	sed well work:	Drill and stimulate new ho	rizontal Marcellus well. Well to be	drilled to a TMD of 150	35'. Well to be drilled to	a TVD of 7735' for logging
purposes, formation at TVD - F	Huntersville Chert. Well will be	plugged back to an approxima	te depth of 6735' (approximate du	e to exact kick off point	being unknown). Pluggir	ng back will be done using
the displacement method and Cl	lass A type cement. If an unexp	ected void is encountered, plan	will be to set casing at a minimum	of 30' past void and cer	nent to surface with appro	oved Class A type cement.
17) Describe fractur	ring/stimulating n	nethods in detail:				
The stimulation will be mul	Itiple stages divided over the	e lateral length of the well	. Stage spacing is dependen	t upon engineering	design. Slickwater fra	cturing technique will
be utilized on each stage u	ising sand, water, and cher	nicals.				
***		***************************************				
18) Total area to be	disturbed, includ	ing roads, stockp	ile area, pits, etc, (acres):	25.6 Acres	
19) Area to be distur	rbed for well pad	only, less access	road (acres):	10.13 Acres		-

WW - 6B (3/13)

103308 AM Count 5-3-13

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	N	J-55	94#	80'	80'	Grout to Surface
Fresh Water	13 3/8"	N	J-55	54.5#	750'	750'	CTS w/ Approved Class A Type Cement
Coal							
Intermediate	9 5/8"	N	J-55	36#	2300'	2300'	CTS w/ Approved Class A Type Cement
Production	5 1/2"	N	P-110	20#	15035'	15035'	2400 cu. ft. W/ 50/50 POZ Lead & Class A Tail
Tubing	2 3/8"	Ν	J-55	4.7#	8135'	8135'	
Liners							

ТҮРЕ	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	26"	0.438	2110	Class A Type	1.18
Fresh Water	13 3/8"	17 1/2"	0.380	2730	Class A Type	1.39
Coal						
Intermediate	9 5/8"	12 3/8"	0.352	3520	Class A Type	1.18
Production	5 1/2"	8 3/4" & 8 1/2"	0.361	12640	Class A Type	1.26
Tubing	2 3/8"	5 1/2" csg	0.190	7700		
Liners		20				

PACKERS

Kind:	None	
Sizes:	None	Received Office of Oil & Gas
Depths Set:	None	Office of Oil of Oas

MAY 2 1 2013

21) Describe centralizer placement for ea	ch casing string.	Conductor - No centr	alizers used. I	Fresh Water &
Coal - Bow spring centralizers on first join	nt then every fourth joint	to 100 feet from surface	. Intermediate	- Bow spring
centralizers one on the first two joints and	d every fourth joint until ir	nside Surface casing. P	roduction - Rig	id bow spring
centralizer on first joint then every 2 joints	s (free floating) through t	he lateral and the curve		
(Note: cementing the 5 1/2" casing comp	letely in open hole latera	l and curve.)		
-				
22) Describe all cement additives associa	ated with each cement t	ype. Conducto	or - 2% CaCl2	
Fresh Water/Coal - 2% CaCl2. Intermedia	ite - 2% CaCl2. Production	on: 2.6% Cement extend	er, 0.7% Fluid	Loss Addative
0.5% High Temperature Retarder, 0.2%	Friction Reducer.			
-				
23) Proposed borehole conditioning process	edures. Conductor -	The hole is augered/drilled w/	air and casing ran	in air. Apart From
insuring the hole is clean via air circulation at	TD there are no other condit	tioning procedures. Fresh	Water/Coal - Th	e hole is drilled
w/ air and casing is ran in air. Once casing is	on bottom the casing shoe	will be cleared with fresh w	ater and gel prio	r to cementing.
Intermediate - The hole is drilled w/ air and ca	sing is ran in air. Once cas	ing is on bottom the casing	shoe will be cle	ared with fresh
water and gel prior to cementing. (Note: Drilling	soap may be utilized if the h	nole gets wet/damp during th	ne drilling of all a	ir holes with the
exception of the Conductor). Production - The	e hole is drilled with synthet	ic oil base mud and once	at TD the hole is	circulated at a
drilling pump rate until the hole is clean. Once ca	asing is ran the hole is circula	ated for a min. of one hole v	olume prior to pu	umping cement.

*Note: Attach additional sheets as needed.

Received Office of Oil & Gas

MAY 2 1 2013

		Page of	
API Number 47 -	001	- 03308	
Operator's	Well N	O. PHL3DHS	

My Commission Expires September 15, 2021

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN


Operator Name CNX Gas Company LLC OP Code 494458046
Watershed (HUC 10) Foxgrape Run Quadrangle Philippi
Elevation 1,444.50' County Barbour District Pleasant
Do you anticipate using more than 5,000 bbls of water to complete the proposed well work? Yes No _x Will a pit be used for drill cuttings? Yes No _x If so, please describe anticipated pit waste: N/A
Will a synthetic liner be used in the pit? Yes No _x If so, what ml.? N/A
Proposed Disposal Method For Treated Pit Wastes:
Land Application Underground Injection (UIC Permit Number Reuse (at API Number Off Site Disposal (Supply form WW-9 for disposal location) Other (Explain Recycle on other wells on the same pad or adjacent pads Will closed loop system be used? Yes
Will closed loop system be used? Yes
Drilling medium anticipated for this well? Air, freshwater, oil based, etc. Air and oil based mud
-If oil based, what type? Synthetic, petroleum, etc. Synthetic
Additives to be used in drilling medium? Bactericide, Polymers and Weighting Agents
Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc. Landfill
-If left in pit and plan to solidify what medium will be used? (cement, lime, sawdust) N/A
-Landfill or offsite name/permit number? MeadowFill, Northwestern Landfill, Max Environmental Yukon Landfill and Bulger Landfill
I certify that I understand and agree to the terms and conditions of the GENERAL WATER POLLUTION PERMIT issued on August 1, 2005, by the Office of Oil and Gas of the West Virginia Department of Environmental Protection. I understand that the provisions of the permit are enforceable by law. Violations of any term or condition of the general permit and/or other applicable law or regulation can lead to enforcement action. I certify under penalty of law that I have personally examined and am familiar with the information submitted on this application form and all attachments thereto and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment. Company Official Signature
Company Official (Typed Name) Jeremy Jones
Company Official Title Designed Agent - General Manager WV Gas Operations
Subscribed and sworn before me this 9th day of May , 20 13 OFFICIAL SEAL NOTARY PUBLIC STATE OF WEST VIRGINIA CAROLINDA FLANAGAI PO Box 603 Lumberport WY 26386


Form WW-9

Operator's Well No. PHL3DHS

CNX Gas Company LL		T	
Proposed Revegetation Treatment: Act	res Disturbed 25.6		ation pH 6.5
Lime according to pH test Tons	/acre or to correct to pl	₁ 7.0	
Fertilizer (10-20-20 or equival	_{lent)} 500 _{lb}	s/acre (500 lbs minimum)	
_{Mulch} hay or straw @	two Tons	acre	
		ed Mixtures	
Amag I	36	od Mixtures	A mag II
Area I Seed Type lbs.	/acre	Seed Type	Area II lbs/acre
Orchard Grass	25	Orchard Grass	25
Birdsfoot Trefoil	15	Birdsfoot Trefo	il 15
Landino Clover	10	Landino Clover	10
Plan Approved by:	om		
*			·
			2
		-	
Title: [Noperly		Date: 5-3-1	13
Field Reviewed?	Yes () No	Received Office of Oil & Gas
		,	01113

MAY 2 1 2013

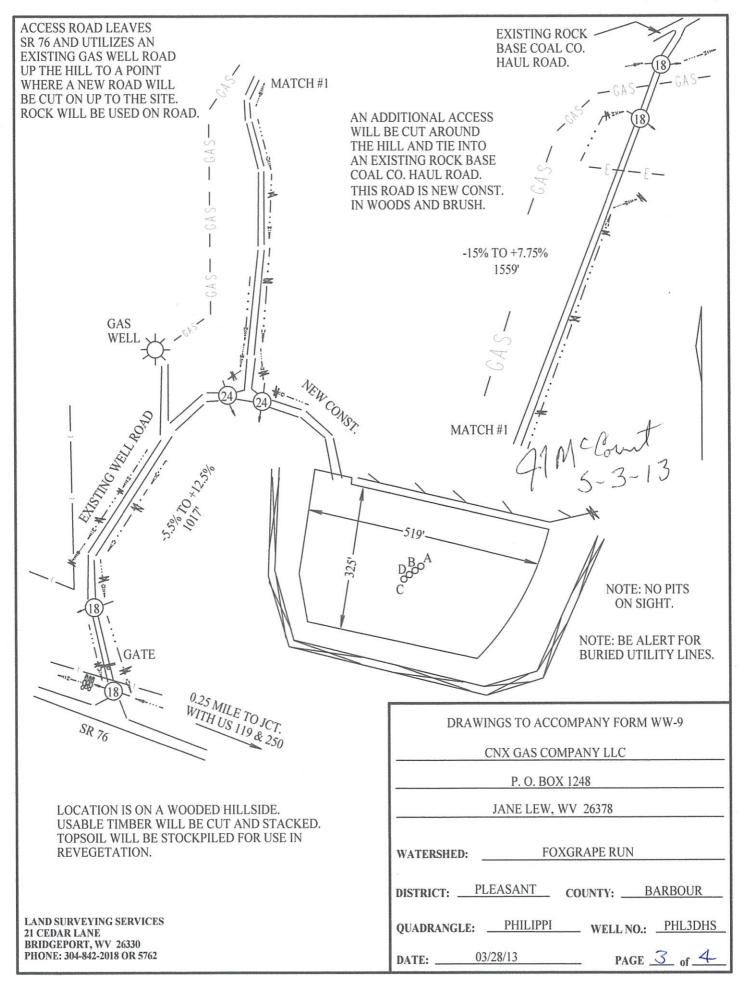

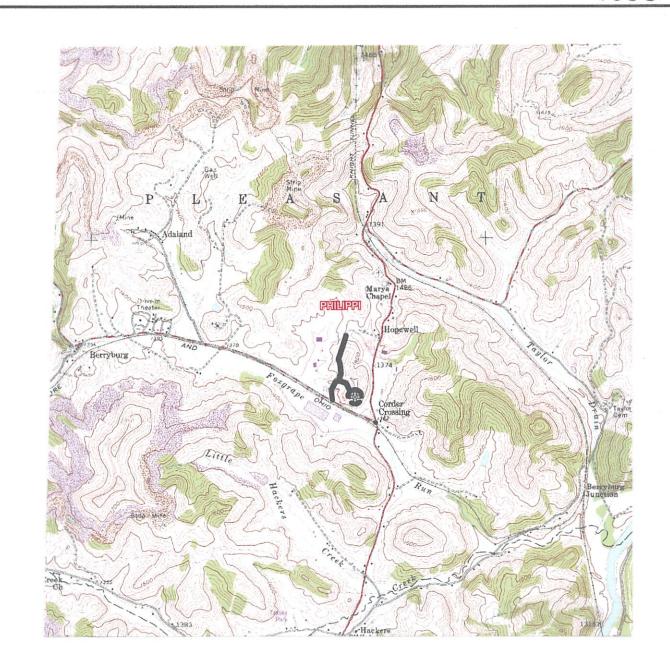

Received Office of Oil & Gas

MAY 2 1 2013

CNX GAS COMPANY LLC

P. O. BOX 1248

JANE LEW, WV 26378

WATERSHED: FOXGRAPE RUN


DISTRICT: PLEASANT COUNTY: BARBOUR

QUADRANGLE: PHILIPPI WELL NO.: PHL3DHS

DATE: 03/28/13 PAGE 4 of 4

DRAWINGS TO ACCOMPANY FORM WW-9

LAND SURVEYING SERVICES 21 CEDAR LANE BRIDGEPORT, WV 26330 PHONE: 304-842-2018 OR 5762

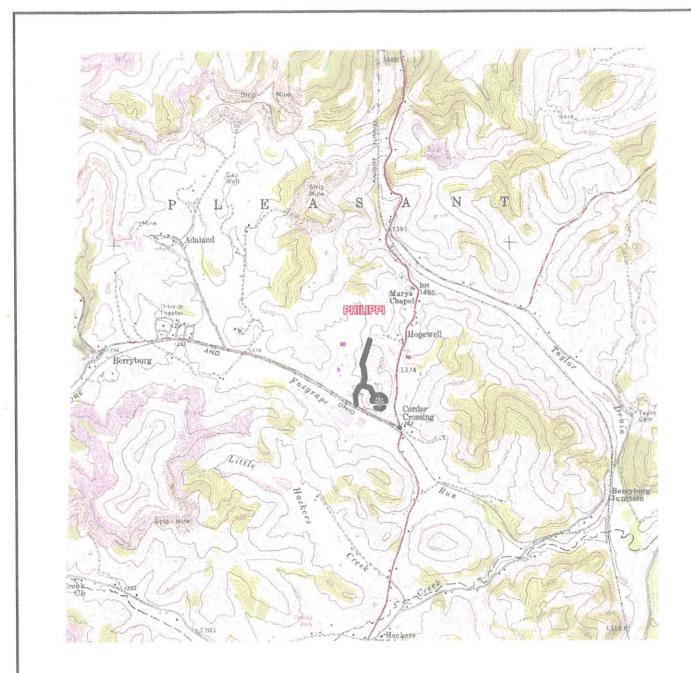

Received Office of Oil & Gas

MAY 2 1 2013

LAND SURVEYING SERVICES 21 CEDAR LANE BRIDGEPORT, WV 26330 PHONE: 304-842-2018 OR 5762

DRAWINGS TO ACCOMPANY FORM WW	V-9
-------------------------------	-----

CNX GAS COMPANY LLC

P. O. BOX 1248

JANE LEW, WV 26378

WATERSHED: FOXGRAPE RUN

DISTRICT: PLEASANT COUNTY: BARBOUR

QUADRANGLE: PHILIPPI WELL NO.: PHL3DHS

DATE: 03/28/13 PAGE 4 of 4

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01311

API/ID Number:

047-001-03308

Operator:

Consol Energy - WV

PHL3DHS

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED JUN 3 0 2013


Source Summary

WMP-01311 API Number: 047-001-03308 Operator: Consol Energy - WV PHL3DHS Stream/River **Tygart Valley River** Barbour **Consol Energy** Source Owner: Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date **End Date** -80.017423 4/1/2014 4/1/2015 12,800,000 39.190421 Regulated Stream? Ref. Gauge ID: 3054500 TYGART VALLEY RIVER AT PHILIPPI, WV Min. Gauge Reading (cfs): Min. Passby (cfs) Max. Pump rate (gpm): 355.01 344.41 1,470 **DEP Comments:**

Source Detail



Median Month monthly flow (cfs)		h monthly flow (+ pump	
1	1,901.06	361.51	1,542.64
2	2,155.51	361.51	1,797.09
3	2,600.93	361.51	2,242.51
4	2,132.23	361.51	1,773.82
5	1,375.48	361.51	1,017.07
6	586.10	361.51	227.69
7	402.01	361.51	43.59
8	280.57	361.51	-77.84
9	177.42	361.51	-181.00
10	286.75	361.51	-71.66
11	950.89	361.51	592.48
12	1,738.34	361.51	1,379.92

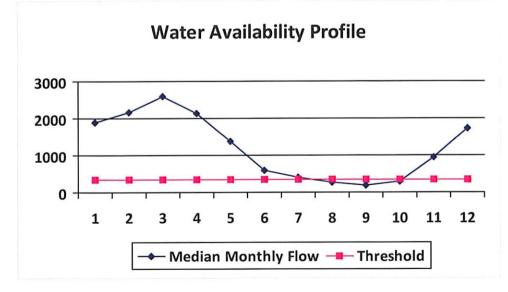

Water Availability Assessment	of Location
Base Threshold (cfs):	347.50
Upstream Demand (cfs):	10.73
Downstream Demand (cfs):	0.00
Pump rate (cfs):	3.28
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	355.01
Passby at Location (cfs):	347.50

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01311

API/ID Number

047-001-03308

Operator:

Consol Energy - WV

PHL3DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID: 20143 Source Name			Little Hackers	Creek Impoundmei	nt (WV83489)	Source start da	ate:	4/1/2014
					Source end da	ce end date: 4/		
		Source Lat:	39.1889	Source Long:	-80.0653	County	Ва	arbour
	Max. Daily Purchase (gal)			Total Volu	ume from Source (gal	:	12,800,000	
DEP Comments: Little Hackers Creek Impoundment Sentinel Mine				nt (WV83489) u	sed by Wolf Run M	ining	Company -	

WMP-01311 API/ID Number 047-001-03308 Operator: Consol Energy - WV

PHL3DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Multi-site impoundment

Source ID:	20144	Source Name	Warder North	Source start of	late:	4/1/2014		
						Source end o	late:	4/1/2015
		Source Lat:	39.192505	Source Long:	-80.025198	County	В	arbour
		Max. Daily Pu	rchase (gal)		Total Volu	me from Source (ga	I):	12,800,000
	DEP Co	omments:						

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-189

Source ID:	20145	Source Name	Warder South Impoundment			Source start dat	e: 4/1/2014
						Source end dat	e: 4/1/2015
		Source Lat:	39.19097	Source Long:	-80.025198	County	Barbour
		Max. Daily Pu	rchase (gal)		Total Volu	me from Source (gal):	12,800,000
	DEP Co	mments:					

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-190

WMP-01311	API/ID Number	047-001-03308	Operator:	Consol Energy - WV

PHL3DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID:	20146	Source Name	Alton 1 Freshw	ater Impoundme	Source start date:	4/1/2014	
						Source end date:	4/1/2015
		Source Lat:	38.794961	Source Long:	-80.184542	County	Upshur
	Max. Daily Purchase (gal)					me from Source (gal):	12,800,000
	DEP Cor	nments:					

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-194

Alton 2 Freshwater Impoundment Source ID: 20147 Source Name Source start date: 4/1/2014 4/1/2015 Source end date: -80.195108 County Upshur Source Lat: 38.806146 Source Long: 12,800,000 Max. Daily Purchase (gal) Total Volume from Source (gal): **DEP Comments:**

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-195

WMP-01311 API/ID Number 047-001-03308 Operator: Consol Energy - WV

PHL3DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Recycled Frac Water

Source ID: 201	48 Source Name	ALT 1 Flowback	k Pit	Source start date	4/1/2014	
					Source end date	e: 4/1/2015
	Source Lat:	38.793967	Source Long:	80.183196	County	Barbour
	Max. Daily Pu	rchase (gal)		Total Volu	12,800,000	
DEP	Comments:					
Source ID: 201	49 Source Name	PHL 1 Flowbac	k Pit		Source start date	4/1/2014
Source ID: 201	49 Source Name	PHL 1 Flowbac	k Pit		Source start date	
Source ID: 201	49 Source Name				Source end date	e: 4/1/2015
Source ID: 201	Source Name Source Lat:	PHL 1 Flowbac 39.192372	k Pit Source Long:	-80.018833		
Source ID: 201		39.192372			Source end date	e: 4/1/2015
	Source Lat:	39.192372			Source end date	e: 4/1/2015 Barbour

WMP-01311 API/ID Number 047-001-03308 Operator: Consol Energy - WV

PHL3DHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID:	20150	Source Name	PHL1; PHL13	; PHL29; PHL4; ALT2; A	Source	Source start date:	
					Source end date:		4/1/2015
		Source Lat:		Source Long:		County	
		Max. Daily P	urchase (gal)		Total Volume from Source (gal):		12,800,000
	DEP Comments:						

